


EQUIPMENT SCHEDULE


AIR CONDITIONING UNITS

ITEM No.	DESCRIPTION	Total Cool. btu/hr	Total Heat. btu/hr	Power supply V, Hz power input W	Operating Current A	Noise Level dBA ±3	Refrigerant	Quantity
AC1	SPLIT WALL MOUNTED	24 000	24 000	220-240, Ø1, 50 2200W	13A	45	R-410A	4x4

LEGEND

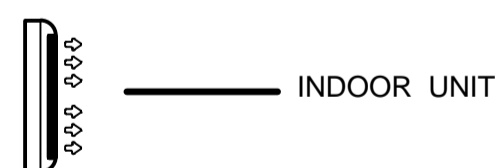

INDOOR UNIT



OUTDOOR UNIT

AIRCONDITIONING NOTES

- 1 - ALL UNITS TO BE MOUNTED ON WALLS INDICATED.
- 2 - THE SPECIALIST AIR-CONDITIONING SUPPLIER & INSTALLER SHALL BE RESPONSIBLE FOR THE PROVISION OF THE ASSOCIATED CABLING FROM THE AIR-CONDITIONING CONTROL BOARD ON EACH INDIVIDUAL UNIT AND FROM THE POWER ISOLATOR TO THE AIR-CONDITIONING CONTROL BOARD.
- 3 - ALL UNITS TO HAVE INDIVIDUAL START CONTROLS
- 4 - ALL DIMENSIONS TO BE VERIFIED ON SITES PRIOR TO COMMENCING SETTING OUT WORKSHOP DRAWINGS OR CONSTRUCTION.
- 5 - WORKSHOP DRAWINGS TO BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO ANY MANUFACTURING
- 6 - ANY DISCREPANCIES, ERRORS OR OMISSIONS TO BE BROUGHT TO THE ENGINEER'S ATTENTION IMMEDIATELY AFTER BEING NOTICED.
- 7 - ALL UNITS TO BE MOUNTED AT LEAST 300mm BELOW THE CEILING.

Notes

AMENDMENT		
Ltr	date	Init
	21/9/21	
Micro-film Drwg No		

Description :
The change of the design from ceiling cassette to wall mounted split units but having same specs.



Ministry of Local Government and
Public Works
P.O. Box CY441 , Causeway
Zimbabwe

Architect	M. DUBE	Director Eng.	E. Njoma	Ministry	FINANCE	Centre	FORBES BORDER MUTARE
Designed	K.Nyemba	Branch Head	D. TAKAINDISA	Title	ZIMRA STAFF COTTAGES	Description	AIRCONDITIONING
Drawn	K. Nyemba	Scale	N.T.S	Date	March 2022	Stock Drwg No	
Checked	KWEZERA	File Ref		G.P. No		Proj No	192593/MECH/02
Telephone	728201/9, Fax 263 4 796204						